

ProLine™

Robotic Tip Dresser (CD-A-F)




Electrode Maintenance Yields Quality Welds

- Compact, light weight
- Dress top and bottom electrodes simultaneously
- Dress at full tip pressure
- Floating cutter head aligns to tips

General Specifications

- Power 240/480VAC
- Current Draw 1.5 amps
- Reduction Ratio 1:20
- Cutting Speed 85 RPM
- Cutting Torque 28.4 NM (21 ft-lbs)
- Duty Cycle Maximum 5 sec.
- Gun Pressure Maximum 3.9kN (880 lbs)

ProLine™

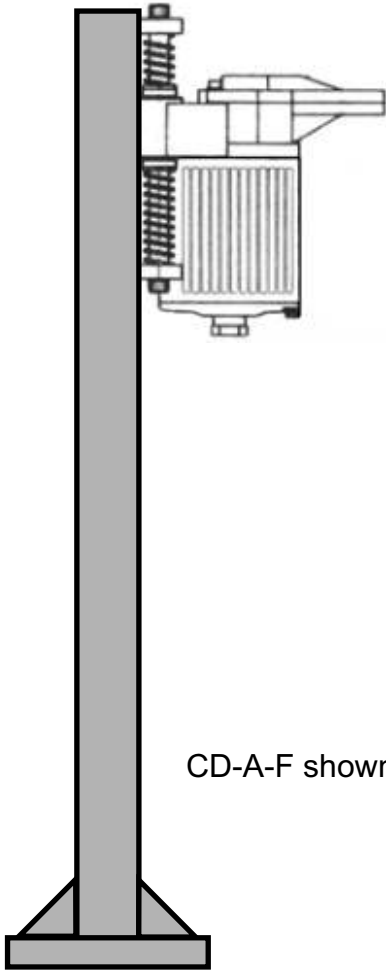

CD-A-F shown with optional stand

